

Street lighting luminaire for installation on poles or brackets Ø60mm on top.

TECHNICAL DETAILS: please refer to the product label

**CE** The EU declaration of conformity can be downloaded from our website [www.marecoluce.it](http://www.marecoluce.it)

 Insulation Class II

 Insulation Class I



**IP66** Protection degree against dust ingress, solid particles, moisture

**CRI<80** This product is intended for use in outdoor applications, industrial applications and other applications for which lighting standards allow a CRI <80.

 Caution, risk of electrical shock. The lighting source of this luminaire must be replaced by the Manufacturer only

 This product must not be disposed as a normal household waste

This luminaire holds a lighting source energy efficiency class.

Skill 36W - 4000K	
Skill 36W - 3000K	
Skill 56,6W - 4000K	
Skill 56,6W - 3000K	
Skill 82,7W - 4000K	
Skill 82,7W - 3000K	

**WARNINGS:**

- THE SAFETY OF THIS PRODUCT IS GUARANTEED ONLY WITH THE RESPECT OF THE EXISTING RULES FOR THE ELECTRICAL SYSTEMS, AND WITH THE APPROPRIATE USE OF THESE INSTALLATION INSTRUCTIONS, THEREFORE IT IS NECESSARY TO KEEP THEM.
- THE IMPROPER USE OF THIS PRODUCT IS FORBIDDEN; ANY TAMPERING WITH THE PRODUCT OR MODIFICATION OF THE PRODUCT THAT IS NOT AUTHORIZED BY MARECO LUCE CAN CAUSE DAMAGE TO PEOPLE, ANIMALS OR THINGS, AND WILL VOID ANY WARRANTY OR LIABILITY.
- SWITCH OFF THE ELECTRICITY BEFORE CONDUCTING ANY KIND OF MAINTENANCE.
- THE PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH BEST PRACTICE.
- DAMAGED COMPONENTS MUST BE REPLACED WITH MARECO LUCE ORIGINAL SPARE PARTS BEFORE REUSING THE PRODUCT.

**GENERAL MAINTENANCE RECOMMENDATIONS:**

- CLEAN THE LUMINAIRE PERIODICALLY TO REMOVE POSSIBLE DIRT DEPOSITS THAT MAY DAMAGE IT OR ALTER THE PHOTOMETRICS PERFORMANCE.
- DO NOT USE HARSH DETERGENTS, ABRASIVE CLOTHES, HIGH-PRESSURE WASHERS, WATER AT A TEMPERATURE HIGHER THAN 60°C TO CLEAN THE LUMINAIRE.
- CHECK THE TIGHTNESS OF THE SCREWS SECURING THE LUMINAIRE TO ITS SUPPORT.
- CHECK THE INTEGRITY OF THE COMPONENTS AND REPLACE THEM IN CASE OF ANY DAMAGE BY USING ORIGINAL MARECO LUCE SPARE PARTS.


The luminaire can be installed on poles of max height <b>15 m</b>
Suitable for mounting <b>on pole and bracket</b>
Luminaire weight: <b>4,9 Kg</b>
Maximum projected surface area subject to wind pressure: <b>0,110 mq</b>
Torque value (in Nm) to apply in tightening all bolts and screws securing the luminaire on its support: <b>5 Nm</b>

**INSTALLATION INSTRUCTIONS:**



1. Adjust the fitting according to the type of installation needed (see Fig.1 or Fig.2) by completely unscrewing the screws (1) that secure the pole top (2) to the housing (3). After setting the pole top position (2), fully tighten the screws (1).
2. Connect the fitting output cable (4) to the power cable and ensure a watertight connection.

**ATTENTION:** use only a double insulation sheathed power cable (HAR type or suitable for outdoor use).

3. Place the device on the pole and tighten the dowels (5).

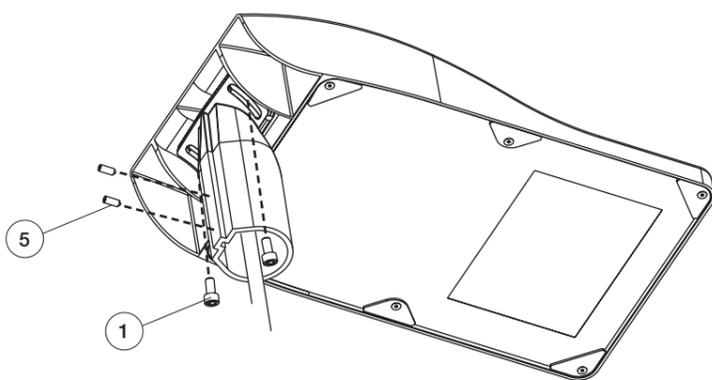

Pole top mounting

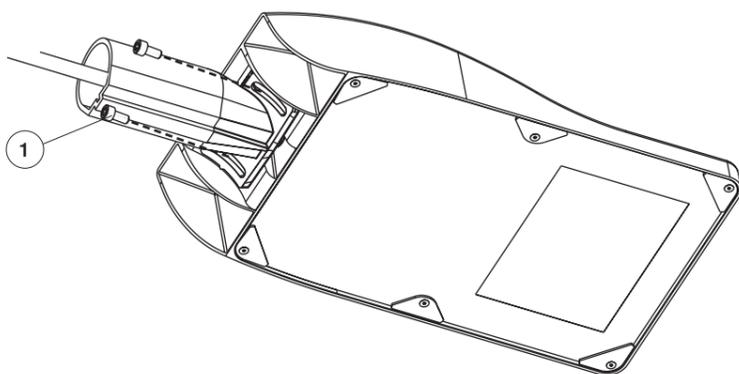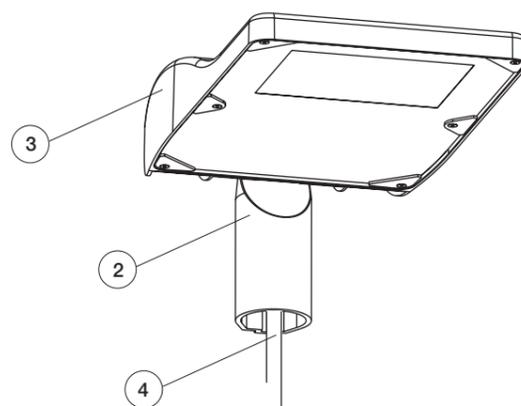

Side entry mounting

