




montaggio soffitto **IP43**    

montaggio parete **IP40**   

**AVVERTENZE:**

- \* IL PRODOTTO VA INSTALLATO DA PERSONALE SPECIALIZZATO
- \* LA SICUREZZA DELL' APPARECCHIO È GARANTITA SOLO CON L'USO APPROPRIATO DELLE SEGUENTI ISTRUZIONI, PERTANTO È NECESSARIO CONSERVARLE.
- \* TOGLIERE LA TENSIONE PRIMA DI EFFETTUARE QUALSIASI TIPO DI MANUTENZIONE.
- \* LE DIMENSIONI MASSIME DELLA LAMPADA 8W DEVONO ESSERE Ø70 L 110 MM
- \* LE DIMENSIONI MASSIME DELLA LAMPADA 11W DEVONO ESSERE Ø85 L 170 MM

**ISTRUZIONI PER L'INSTALLAZIONE:**

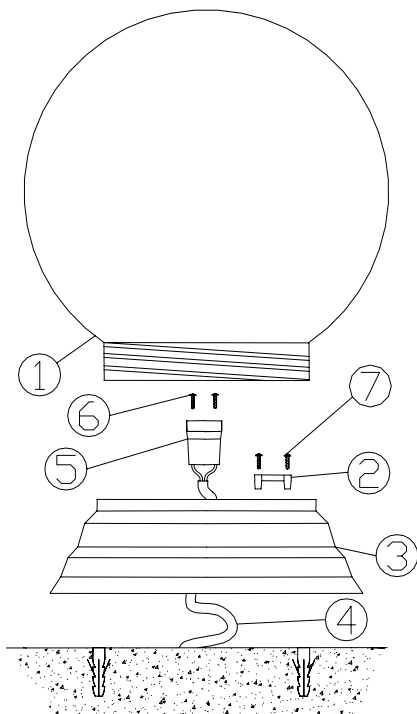

1. Rimuovere il diffusore (1) ruotandolo in senso antiorario.
2. Rimuovere la lamella bloccacavo (2) situata sul fondo della base (3).
3. Inserire il cavo di alimentazione (4) all'interno della base (3) e collegarlo al portalampada (5).
4. Fissare la base (3) alla superficie di montaggio, mediante viti e tappi ad espansione (non forniti in dotazione).
5. Posizionare il portalampada (5) e serrare le viti (6).
6. Bloccare il cavo di alimentazione (4) con il bloccacavo (2) serrando le viti (7).
7. Inserire la lampada (non fornita in dotazione).
8. Montare il diffusore (1) e ruotarlo in senso orario.


Ceiling mounting **IP43**    

Wall mounting **IP40**   

**WARNING:**

- THIS SHOULD BE INSTALLED BY SPECIALISED PERSONNEL
- SAFETY IS GUARANTEED ONLY IF THE FOLLOWING INSTRUCTIONS ARE PROPERLY APPLIED. THEREFORE IT IS MANDATORY TO PRESERVE THIS SHEET.
- TURN OFF MAINS SUPPLY BEFORE UNDERTAKING ANY SERVICING.
- THE VERSIONS PRE-SET FOR 8W FBT LAMP CAN BE EQUIPPED WITH LAMP OF MAX. DIMENSION Ø70 L110 MM.
- THE VERSIONS PRE-SET FOR 11W FBT LAMP CAN BE EQUIPPED WITH LAMP OF MAX. DIMENSION Ø85 L170 MM.

**ASSEMBLY INSTRUCTIONS:**

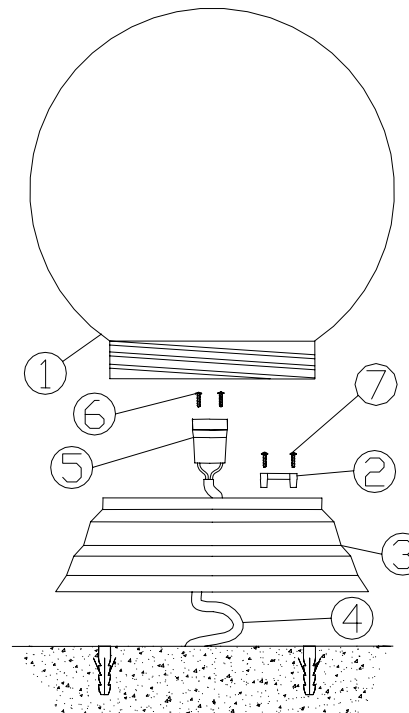

1. Remove the diffuser (1) rotating anti-clockwise
2. Remove the cord block (2) at the bottom of the base (3).
3. Insert the supply cable (4) into the base (3) and connect it to the lamp holder (5).
4. Fix the base (3) to the mounting surface, using the screws and expansion plugs (not supplied).
5. Position the lamp holder (5) and tighten the screws (6).
6. Fix the supply cable (4) with the cable gland (2) tightening the screws (7).
7. Insert the lamp (not supplied).
8. Fix the diffuser (1) rotating clockwise