

Istruzioni per l'uso e la manutenzione

SLOT 64 - PICCHETTO



Apparecchio di illuminazione fisso per uso generale.
DATI DI TARGA: fare riferimento all'etichetta prodotto

La dichiarazione UE di conformità è disponibile e scaricabile dal sito www.marecoluce.it

IP65 Grado di protezione contro la penetrazione di polvere, corpi solidi, umidità

Questo prodotto non deve essere smaltito come un normale rifiuto domestico

AVVERTENZE:


- LA SICUREZZA DELL'APPARECCHIO È GARANTITA SOLO CON IL RISPETTO DELLE NORME IMPIANTISTICHE VIGENTI E CON L'USO APPROPRIATO DELLE SEGUENTI ISTRUZIONI, PERTANTO È NECESSARIO CONSERVARLE.
- È VIETATO L'USO IMPROPRIO DELL'APPARECCHIO, OGNI MANOMISSIONE DEL PRODOTTO O MODIFICA DELLO STESSO NON AUTORIZZATA DA MARECO LUCE PUÒ CAUSARE DANNI A PERSONE, ANIMALI O COSE E NE FA DECADERE OGNI GARANZIA E RESPONSABILITÀ.
- TOGLIERE LA TENSIONE PRIMA DI EFFETTUARE QUALSIASI TIPO DI OPERAZIONE.
- IL PRODOTTO DEVE ESSERE INSTALLATO A REGOLA D'ARTE.
- EVITARE L'INSTALLAZIONE IN AVVALLAMENTI O IN PUNTI DI RISTAGNO D'ACQUA.
- NON UTILIZZARE UTENSILI PER RIMUOVERE LO SCHERMO PER NON DANNEGGIARE LA GUARNIZIONE.
- L'APPARECCHIO DEVE ESSERE COLLEGATO AL CIRCUITO DI TERRA DELL'IMPIANTO ELETTRICO.
- NESSUNA PARTE DELL'APPARECCHIO DEVE VENIRE A CONTATTO CON SOSTANZE CHIMICHE AGGRESSIVE, AGENTI DECONGELANTI, ATMOSFERE SALINE.
- NON COPRIRE LE PARTI IN VISTA DELL'APPARECCHIO.
- NON INSTALLARE IL PRODOTTO IN CASO DI PIOGGIA, NEBBIA, FORTE UMIDITÀ.
- IN CASO DI COMPONENTI DANNEGGIATI, ESSI VANNO SOSTITUITI PRIMA DI RIMETTERE IN SERVIZIO L'APPARECCHIO CON RICAMBI MARECO LUCE.
- UTILIZZARE LAMPADINE MAX 5W CON ATTACCO GU10 E D_s50mm. ATTENZIONE: PER RISPETTARE IL GRADO IP DICHIARATO È NECESSARIO SERRARE A FONDO L'ANELLO DI CHIUSURA. NON UTILIZZARE LAMPADINE CON SCHERMO BOMBATO.

RACCOMANDAZIONI GENERALI PER LA MANUTENZIONE:

- PULIRE PERIODICAMENTE LA PARTE IN VISTA DELL'APPARECCHIO E RIMUOVERE GLI ACCUMULI DI SPORCO CHE SI POSSONO DEPOSITARE SUL DIFFUSORE E SULLA CORNICE.
- PER LA PULIZIA DEL DIFFUSORE E DELLA CORNICE NON UTILIZZARE DETERGENTI AGGRESSIVI; NON UTILIZZARE IDROPULTRICI.
- È CONSIGLIABILE L'USO DI GRASSO AL SILICONE SUL FILETTO DELL'ANELLO DI CHIUSURA DELL'APPARECCHIO PER FACILITARE LE MANUTENZIONI FUTURE.
- VERIFICARE L'INTEGRITÀ DEI COMPONENTI DELL'APPARECCHIO: SOSTITUIRILI IN CASO DI DANNEGGIAMENTO UTILIZZANDO SOLO RICAMBI ORIGINALI MARECO LUCE.
- VERIFICARE L'INTEGRITÀ E L'ELASTICITÀ DELLE GUARNIZIONI CHE NON DEVONO RISULTARE INDURITE, INTERROTTE O DANNEGGIATE.

ISTRUZIONI PER L'INSTALLAZIONE:

1. Avvitare il picchetto (1) al corpo (2).
2. Inserire nel terreno Slot 64 senza superare il limite di interramento del picchetto (1).
3. Effettuare il collegamento di rete utilizzando una connessione stagna e rispettando le polarità e la classe di isolamento dell'apparecchio.
4. Regolare il faretto nella posizione desiderata e serrare le vite (3).

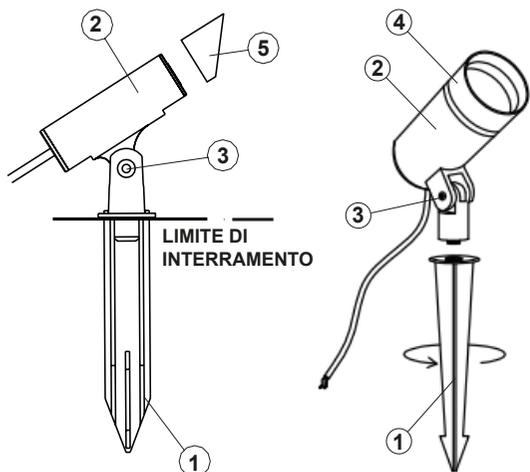

ISTRUZIONI PER L'ACCESSORIO:

1. Svitare e rimuovere l'anello con vetro (4).
2. Inserire l'OR dell'accessorio LID (5) in fondo alla filettatura del corpo.
3. Serrare a fondo la palpebra LID (5) sul corpo.
4. Regolare la copertura ruotandola in entrambi i sensi.

Use and maintenance instructions

SLOT 64 - SPIKE

Fixed lighting fixture for general use.
TECHNICAL DETAILS: refer to the product label

The EU declaration of conformity can be downloaded from our website www.marecoluce.it

IP65 Protection degree against dust ingress, solid particles, moisture

This product must not be disposed as a normal household waste

WARNINGS:

- THE SAFETY OF THIS PRODUCT IS GUARANTEED ONLY WITH THE RESPECT OF THE EXISTING RULES FOR THE ELECTRICAL SYSTEMS AND WITH THE APPROPRIATE USE OF THESE INSTALLATION INSTRUCTIONS, THEREFORE IT IS NECESSARY TO KEEP THEM.
- THE IMPROPER USE OF THIS PRODUCT IS FORBIDDEN; ANY TAMPERING WITH THE PRODUCT OR MODIFICATION OF THE PRODUCT THAT IS NOT AUTHORIZED BY MARECO LUCE CAN CAUSE DAMAGE TO PEOPLE, ANIMALS OR THINGS AND WILL VOID ANY WARRANTY OR LIABILITY.
- SWITCH OFF THE ELECTRICITY BEFORE CONDUCTING ANY KIND OF MAINTENANCE.
- THE PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH BEST PRACTICE.
- DO NOT INSTALL THE LUMINAIRES IN HOLLOWES OR IN AREAS WITH WATER STAGNATION.
- DO NOT USE ANY TOOL TO REMOVE THE DIFFUSER AS THIS COULD DAMAGE THE GASKET.
- THE LUMINAIRE MUST BE CONNECTED TO THE EARTH CIRCUIT OF THE ELECTRICAL SYSTEM.
- NO PART OF THE LUMINAIRE MUST BE IN DIRECT CONTACT WITH HARSH CHEMICALS, ANTIFREEZING LIQUIDS AND SALTY ENVIRONMENTS.
- DO NOT COVER THE VISIBLE PARTS OF THE LUMINAIRE.
- DO NOT INSTALL THE PRODUCT IN CASE OF RAIN, FOG OR STRONG MOISTURE.
- DAMAGED COMPONENTS MUST BE REPLACED WITH MARECO LUCE ORIGINAL SPARE PARTS BEFORE REUSING THE PRODUCT.
- USE MAX 5W LAMPS WITH GU10 ATTACK AND D_s50mm. ATTENTION: TO COMPLY WITH THE DECLARED IP DEGREE, THE CLOSING RING MUST BE TIGHTENED. DO NOT USE LAMPS WITH ROUND SCREEN.

GENERAL MAINTENANCE RECOMMENDATIONS:

- CLEAN THE EXTERIOR PART OF THE LUMINAIRE PERIODICALLY IN ORDER TO REMOVE DIRT DEPOSITS ON THE DIFFUSER AND ON THE FRAME.
- DO NOT USE HARSH DETERGENTS, ABRASIVE CLOTHES, HIGH-PRESSURE WASHERS, WATER AT A TEMPERATURE HIGHER THAN 60°C TO CLEAN THE LUMINAIRE.
- IT IS RECOMMENDED THE USE OF SILICONE GREASE ON THE CLOSING RING THREAD TO MAKE FUTURE MAINTENANCE EASY.
- CHECK THE INTEGRITY OF THE COMPONENTS AND REPLACEMENT IN CASE OF DAMAGE BY USING ONLY MARECO LUCE ORIGINAL SPARE PARTS.
- CHECK THE INTEGRITY AND THE FLEXIBILITY OF THE GASKETS, WHICH MUST HARDEN, BREAK OR DAMAGE IN ANY WAY.

INSTALLATION INSTRUCTIONS:

1. Screw the stake (1) to the body (2).
2. Insert Slot 64 into the ground without exceeding the burial limit of the stake (1).
3. Make the network connection using a watertight connection and respecting the polarity and insulation class of the appliance.
4. Adjust the spotlight in the desired position and tighten the screw (3).

INSTRUCTIONS FOR THE SNOOT (LID)

1. Loosen and remove the ring with the diffuser (4).
2. Insert the O-ring of the snoot (5) into the threaded part of the housing.
3. Tighten the snoot (5) on the housing all the way.
4. Orient the snoot by making it turn.

