


#### LUX EST wall mounting applique 45°




#### LUX EST applique 90°

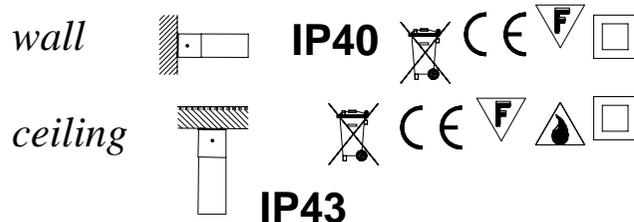

#### WARNINGS:

- \* THE INSTALLATION AND THE MAINTENANCE OF THE PRODUCT MUST BE DONE BY PROFESSIONAL INSTALLERS.
- \* THE SAFETY OF THIS PRODUCT IS GUARANTEED ONLY WITH THE APPROPRIATE USE OF THESE INSTALLATION INSTRUCTIONS WHICH MUST BE RETAINED.
- \* TOGLIERE LA TENSIONE PRIMA DI EFFETTUARE QUALSIASI TIPO DI MANUTENZIONE.
- \* SWITCH OFF THE ELECTRICITY BEFORE CONDUCTING ANY KIND OF MAINTENANCE.
- \* ONLY OUTDOOR INSTALLATION IS ALLOWED.
- \* THE BASE AND THE OTHER PARTS OF THE PRODUCT CAN NOT BE COVERED BY SOIL OR PUT IN CONTACT WITH AGGRESSIVE CHEMICAL SUBSTANCES (HERBICIDES, FERTILIZINGS, ETC..).
- \* DO NOT REST OBJECTS ON THE DIFFUSER, DO NOT COVER OR OBSCURE IN ANY WAY
- \* CLEAN PERIODICALLY THE PARTS COVERED BY SOIL.
- \* IT IS ADVISABLE TO USE THE SILICONE GREASE ON THE THREADED PARTS OF THE CLOSING SCREWS, IN ORDER TO MAKE THE FURTHER MAINTENANCE EASIER.
- \* THE VERSIONS PRE-SET FOR LAMP 27W CAN BE EQUIPPED WITH LAMPS OF MAX. DIMENSION Ø65 L 200 MM .
- \* THE VERSIONS PRE-SET FOR LAMP 21W CAN BE EQUIPPED WITH LAMP OF MAX. DIMENSION Ø65 L 155 MM.
- \* THE VERSIONS PRE-SET FOR LAMP 12W CAN BE EQUIPPED WITH LAMP OF MAX. DIMENSION Ø65 L 111 MM.

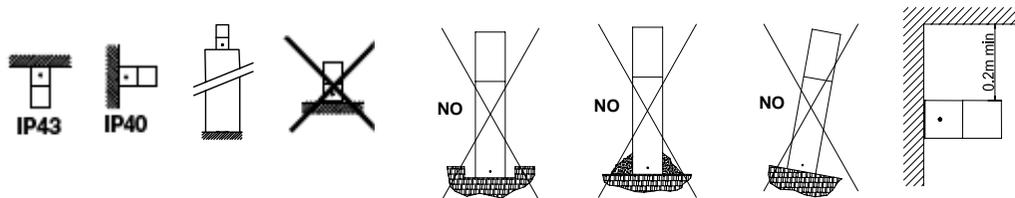

#### INSTRUCTIONS FOR THE INSTALLATION – FBT version:

1. Untighten the screws **(1)** and remove the square cover (aluminium body+diffuser) **(2)**.
2. Untighten the screws **(3)** and remove the lamp holder.
3. Insert the supply cable through the cable tray.
4. Fix the base **(4)** to the mounting surface through some screws and expansions caps (not included).
5. Connect the supply cables to the lamp holder and tighten the screws **(3)**.
6. Insert the lamp (not included).
7. Insert the square cover **(2)** into the base **(4)** and tighten the screws **(1)**.

#### INSTRUCTIONS FOR THE INSTALLATION – FSQ version:

1. Untighten the screws **(1)** and remove the square cover (aluminium body+diffuser) **(2)**.
2. Remove the lamp holder **(3)**.
3. Untighten the screws **(4)** and remove the bracket **(5)**.
4. Insert the supply cable through the cable tray.
5. Fix the base **(6)** to the mounting surface through some screws and expansions caps (not included).
6. Connect the supply cable to the terminal **(7)**.
7. Position the bracket **(5)** and tighten the screws **(4)**.
8. Insert the lamp holder on the bracket and put the lamp (not included)
9. Insert the square cover **(2)** into the base **(6)** and tighten the screws **(1)**.

