


## Assembly and maintenance instructions

### Maia


Wall recessed luminaire complete with recessed box (3 modules recessed box)


TECHNICAL DETAILS: refer to the product label

 The EU declaration of conformity is available and can be downloaded from the website [www.marecoluce.it](http://www.marecoluce.it)

 Insulation class II

**IP65** Degree of protection IP65 (against the penetration of dust, solid particles, moisture).

 Caution, risk of electrical shock. The lighting source of this luminaire must be replaced by the Manufacturer only


 This product shall not be treated as normal urban waste

### WARNINGS:


- THE SAFETY OF THIS PRODUCT IS GUARANTEED ONLY WITH THE RESPECT OF THE EXISTING RULES FOR THE ELECTRICAL SYSTEMS, AND WITH THE APPROPRIATE USE OF THESE INSTALLATION INSTRUCTIONS, THEREFORE IT IS NECESSARY TO KEEP THEM.
- THE IMPROPER USE OF THIS PRODUCT IS FORBIDDEN; ANY TAMPERING WITH THE PRODUCT OR MODIFICATION OF THE PRODUCT THAT IS NOT AUTHORIZED BY MARECO LUCE CAN CAUSE DAMAGE TO PEOPLE, ANIMALS OR THINGS, AND WILL VOID ANY WARRANTY OR LIABILITY.
- SWITCH OFF THE ELECTRICITY BEFORE CONDUCTING ANY KIND OF MAINTENANCE.
- THE PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH BEST PRACTICE.
- THE LIGHTING SOURCE OF THIS LUMINAIRE MUST BE REPLACED BY THE MANUFACTURER ONLY.
- IN CASE OF DAMAGED COMPONENTS, THEY MUST BE REPLACED WITH NEW MARECO LUCE SPARE PARTS BEFORE PUTTING THE PRODUCT INTO OPERATION.

### GENERAL MAINTENANCE RECOMMENDATIONS:

- CLEAN THE LUMINAIRE PERIODICALLY IN ORDER TO REMOVE THE DUST THAT MIGHT SETTLE ON THE DIFFUSER AND ON THE COVER, BY FOLLOWING THE INSTALLATION INSTRUCTIONS.
- CHECK THE TIGHTENING OF THE SCREWS THAT SECURE THE LUMINAIRE TO THE WALL, MAX. 0,8Nm.
- CHECK THE INTEGRITY OF THE COMPONENTS OF THE LUMINAIRE: REPLACE THEM IN CASE OF DAMAGE USING ONLY ORIGINAL MARECO LUCE SPARE PARTS.
- DO NOT CLEAN THE DIFFUSER AND THE COVER WITH AGGRESSIVE CLEANING AGENTS; DO NOT USE HIGH PRESSURE WASHERS.
- CHECK THE PLASTIC COVERS IN ORDER TO VERIFY POSSIBLE DAMAGES TO THE INSULATIONS.
- CHECK THE INTEGRITY AND THE ELASTICITY OF THE GASKETS, WHICH MUST NOT BE DRY, BROKEN OR DAMAGED.
- DO NOT REMOVE OR TAMPER WITH THE GROMMET IN ORDER TO PRESERVE THE IP RATING OF THE LUMINAIRE.

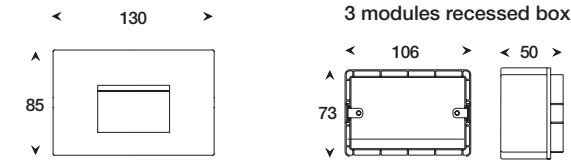

Measures expressed in mm

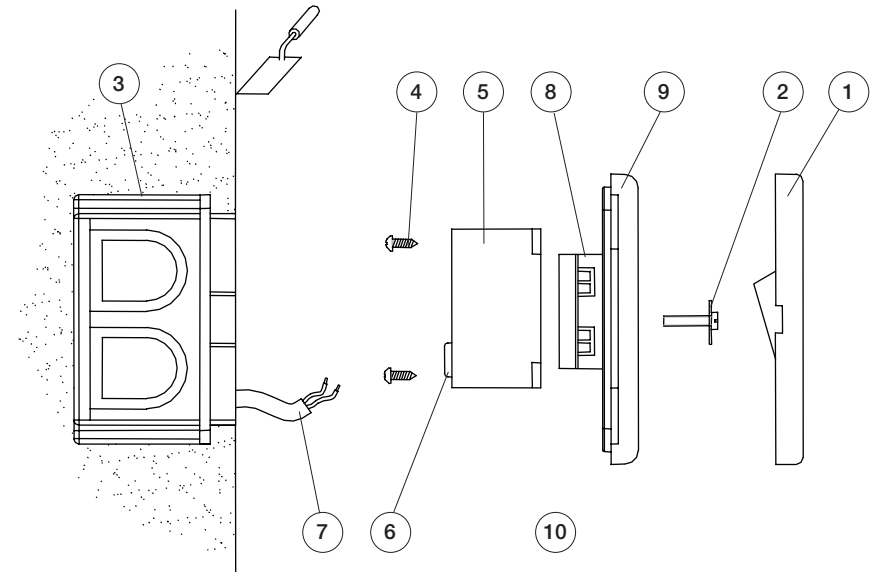

### INSTALLATION INSTRUCTIONS:

1. Remove the cover (1), and loosen the screws (2).
2. Cement the recessed box (3) flush with the wall; in case of installation in pre-existing recessed boxes check that they are of the same dimensions of the one supplied (3 modules recessed box).
3. Loosen the screws (4) and remove the control gear cover (5).
4. Remove at least 8cm of the main sheath of the supply cable (7), and insert the single wires through the grommet (6).

**ATTENTION:** do not remove or tamper with the grommet (6) in order to preserve the IP rating of the luminaire.

5. Connect the wires (7) to the terminal block (8), making sure that polarities are respected.
6. Position the luminaire (9) into the recessed box (3) and tighten the screws (2) max. 0,8Nm.

**ATTENTION:** check that the gasket is positioned correctly.

7. Install the cover (1).