



# Use and maintenance instructions

## Easy Lux


Outdoor luminaire suitable for installation on concrete plinth.

TECHNICAL DETAILS: refer to the product label

 The UE declaration of conformity can be downloaded from our website [www.marecoluce.it](http://www.marecoluce.it)


 Insulation Class II

**IP65** Protection degree against dust ingress, solid particles, moisture

 This product must not be disposed as a normal household waste

**WARNINGS:**

- THE SAFETY OF THIS PRODUCT IS GUARANTEED ONLY WITH THE RESPECT OF THE EXISTING RULES FOR THE ELECTRICAL SYSTEMS, AND WITH THE APPROPRIATE USE OF THESE INSTALLATION INSTRUCTIONS, THEREFORE IT IS NECESSARY TO KEEP THEM.
- THE IMPROPER USE OF THIS PRODUCT IS FORBIDDEN; ANY TAMPERING WITH THE PRODUCT OR MODIFICATION OF THE PRODUCT THAT IS NOT AUTHORIZED BY MARECO LUCE CAN CAUSE DAMAGE TO PEOPLE, ANIMALS OR THINGS, AND WILL VOID ANY WARRANTY OR LIABILITY.
- SWITCH OFF THE ELECTRICITY BEFORE CONDUCTING ANY KIND OF MAINTENANCE.
- THIS PRODUCT IS SUITABLE FOR OUTDOOR INSTALLATION ONLY.
- THE PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH BEST PRACTICE.
- DAMAGED COMPONENTS MUST BE REPLACED WITH MARECOLUCE ORIGINAL SPARE PARTS.
- DO NOT OBSCURE OR COVER THE TOP PART ( TOP COVER + DIFFUSER) IN ANY WAY.
- MAX. LAMP SIZE (IN MM):



**GENERAL MAINTENANCE RECOMMENDATIONS:**

- CLEAN THE LUMINAIRE PERIODICALLY TO REMOVE POSSIBLE DIRT DEPOSITS THAT MAY DAMAGE IT OR ALTER THE PHOTOMETRICS PERFORMANCE.
- DO NOT USE HARSH DETERGENTS, ABRASIVE CLOTHES, HIGH- PRESSURE WASHERS, WATER AT A TEMPERATURE HIGHER THAN 60°C TO CLEAN THE LUMINAIRE.
- DO NOT USE HARSH DETERGENTS TO CLEAN THE DIFFUSER
- CHECK THE TIGHTNESS OF THE SCREW SECURING THE FITTING.
- CHECK THE INTEGRITY OF THE FITTING COMPONENTS: REPLACE THEM IN CASE OF DAMAGE BY USING ONLY ORIGINAL MARECO LUCE PARTS
- CHECK THE PLASTIC CASINGS CAREFULLY IN ORDER TO IDENTIFY ANY POSSIBLE INSULATION DAMAGE.

**INSTALLATION INSTRUCTIONS FOR PLINTH MOUNTING:**


1. Loosen the screws (1) and remove the base (2).
2. Fasten the base (2) to the plinth using some screws or expansion caps (not included) by applying 2,5 Nm.

**PAY ATTENTION:** Choose screws and expansion caps suitable for the type of installation that you are conducting.

3. Connect the luminaire to the mains throughout a watertight connection, and paying attention to respect both the polarities and the insulation class.
4. Insert the housing (3) into the base (2) and tighten the screws (1).
5. Remove the diffuser (4) to access to the lamp holder (5).
6. Insert the lamp (NOT included with the luminaire).
7. Tighten the diffuser (4) and make sure that the gasket is in the correct position.

**PAY ATTENTION:**

The linear IP68 connector can be placed inside the luminaire; the connection must be conducted before fixing the bollard to the base.

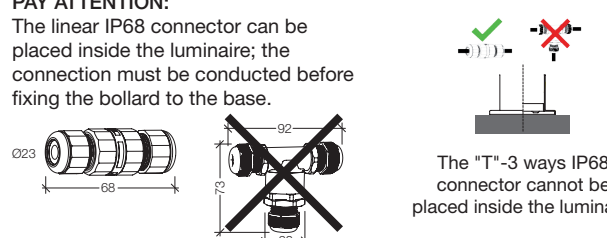

The "T"-3 ways IP68 connector cannot be placed inside the luminaire

