

This document is exclusive MARECO LUCE s.r.l., is strictly prohibited disclosure or reproduction, even partial, as well the use of without written consent of MARECO LUCE s.r.l..The company reserves the right to change models, dimensions and materials at any time without notice.

PRODUCT DATA SHEET

Stud Led

Code : 1876282M

PRODUCT FAMILY

- Urban architectural LED luminaire, suitable for upright installation on poles Ø60mm on top (IP65)

MATERIAL CHARACTERISTICS

- Body made of die-cast aluminum (ADC12) anodized and painted
- Access door/gear tray and top cover made from thermosetting resin (BMC), painting process
- Heat sink frame for in solid, anodised aluminium
- Gear tray in stainless steel AISI 304L
- Diffuser in thick (4mm) transparent PMMA (acrylic)
- Polyester powder coating with a pretreatment (Phosphochromating method) to ensure high protection against weathering
- Silicone gaskets
- A2 stainless steel screws

COLOUR

- Anthracite RAL 7016 textured

LIGHTING CHARACTERISTICS

- LED's lighting source in fixed position
- Immediately ON at 100% of the light flux
- Monochromatic LED module (24 Led's)
- Led's SeoulZ5M2
- Round symmetrical light throw
- Lenses in highly transmittant PMMA (93% efficiency) with unilateral opening of light beam allowing for good spacing between luminaire
- One lens for each group of 3 LED's is fitted with a more diffused lens to guarantee uniformity of the light flux, especially directly below the luminaire
- LED's covers arranged in a ring formation, made from NY/FV30% matte white colour, snaps into place without screws LED optics for a round symmetrical, predominantly frontal light throw, guaranteeing a good level of performance at elevated distances
- Luminaire conforms with local and international dark sky laws with emission 0.49cd/Klm for angles 90°, Rn 0.04% - 67.09%

WIRING CHARACTERISTICS

- n°8 monochromatic LED's module with n°3 Led's SeoulZ5M2
- Built-in driver (700mA driver output)
- The modules are connected in parallel via a quick release connector, fixed to the thick circular anodised aluminium heat sink through n.2 screws
- Heat sink frame for LED's in thick anodised aluminium connected to cover with thermo-conducting silicone grease
- Heat sink frame/LED's modules are easily replaced because of polarised connector

INSTALLATION AND ORDINARY MAINTENANCE CHARACTERISTICS

- Luminaire for Ø60mm pole top installation, fixed with n.2 dowels (supplied)
- Cable clamp on cut-out switch, Ø15mm max
- Cut-out safety switch removing all electrical current to fitting when opening access door
- Ordinary maintenance through access door to driver support plate, removable by sliding the support plate through the housing of the luminaire
- In the case of malfunction, one LED module malfunctions, however the other modules remains functional keeping the light fitting o

DIMENSIONS

- Ø735x800mm

OPTIONAL ACCESSORY TO BE ORDERED SEPARATELY:

- Cod. CS160036 Surge protection kit
- When purchased the protection kit will be installed inside the luminaire
- Max impulse voltage UOC 10KV

- Voltage protection level L-N <1500V
- Voltage protection level L-PE <1500V

TECHNICAL SPECS

- LED's type: SeoulZ5M2
- Step MacAdam: 3
- Lifetime Led's: L80/B50 - 100Kh Tc 85°C
- Lifetime driver: 50Kh
- Power factor: 0.96
- Warranty: 2 years

TECHNICAL SPECS 4000K

- LED's output: 6505lm@tc25°C
- Luminaire output: 5154lm@ta25°C
- LED's efficiency: 129lm/W
- Luminaire efficiency: 92lm/W
- LED's consumption: 50.4W
- Luminaire consumption: 56.5W
- RG: 2 <60cm

TECHNICAL SPECS 3000K


- LED's output: 6384lm@tc25°C
- Luminaire output: 5070lm@ta25°C
- LED's efficiency: 127lm/W
- Luminaire efficiency: 91lm/W
- LED's consumption: 50.4W
- Luminaire consumption: 56.5W
- RG: 2 <45cm

Rev 04-30/09/2021

Details

- Conformity with CEE directives
- CLASS I
- IK08
- RG2
- CRI>80
- CLASS A+
- IP 65



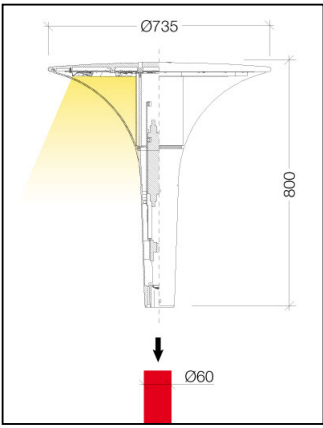

220-240V 50/60Hz 56,5W

CE	⊕	IK 08	RG	CRI ≥80	A+	IP65
----	---	-------	----	---------	----	------

